





Jetwave Group

10-16 Smith Street Thebarton I  
Adelaide I South Australia I 5031 I AU

+61 8 8371 3599

sales@jetwave.com.au

jetwave.com.au

## HOSE REEL CONFIGURATION OPTIONS



1.0 Skid - No Reel




1.1 Skid - Top Hose Reel




1.2 Skid - Top Hose Reel  
with Roller Guide (HGS™)



2.1 Trolley Kit - With  
Roller Guide



1.3 Skid - Front  
Hose Reel



1.4 Skid - Front Double  
Stacked Hose Reels



1.5 Skid - Top Double Stack  
Hose Reels



2.1 Trolley Kit - With Roller  
Guide & Front Hose Reel

## STANDARD EQUIPMENT




Spray Gun, Lance & Nozzle

Pro Rapid Style Hose Reel with  
lead hose & ball valve  
60m 3/8" Thermoplastic  
Jetter Hose

IP68 Pelican Style Case  
Professional Nozzle Kit

## OPTIONAL EQUIPMENT

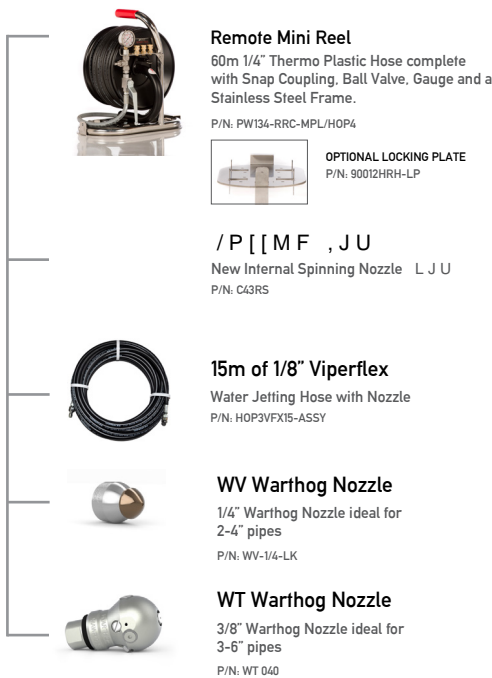

Remote Mini Reel

60m 1/4" Thermo Plastic Hose complete  
with Snap Coupling, Ball Valve, Gauge and a  
Stainless Steel Frame.

P/N: PW134-RRC-MPL/HOP4



OPTIONAL LOCKING PLATE  
P/N: 90012HRH-LP

/ P [ [ M F , J U ]

New Internal Spinning Nozzle L J U  
P/N: C43RS

15m of 1/8" Viperflex

Water Jetting Hose with Nozzle  
P/N: HOP3VFX15-ASSY

WV Warthog Nozzle

1/4" Warthog Nozzle ideal for  
2-4" pipes

P/N: WV-1/4-LK

WT Warthog Nozzle

3/8" Warthog Nozzle ideal for  
3-6" pipes

P/N: WT 040

## OPTIONAL MACHINE UPGRADES

Whip Sock, Engine Hour Meter, Forklift Pockets, Emergency Stop, Battery Isolator, Bypass Tank, Low Level Water Cut Out	p/n	Included
Double Stacked Top Hose Reel Kit	p/n	JWA430-B
Double Stacked Front Hose Reel Kit	p/n	JWA429-B
4 Wheel Trolley Kit	p/n	JWA407A
Hose Reel Roller Guide (HGS™)	p/n	1067-GUIDEASSY

Product Code	p/n	HJ5000-23PH
--------------	-----	-------------

### TECHNICAL DATA

Working Pressure	psi / bar	5075 / 350
Flow Rate	l/pm	23
Max Water Inlet Temp	fc	60

### INTENDED APPLICATION

Usage Frequency	hours / type	4 - 6 Daily / Daily Usage
Category of Dirt / Debris	type	Heavy
Class (AS/NZS: 4233)	grade	B (7,800 BAR/LITRES)

### MOTOR FEATURES

Engine	type	HONDA™ GX690 (4 stroke, air cooled)
Power	hp / cc	24 / 690
Fuel Supply	type	Unleaded
Fuel Tank Capacity	litres	25 (with level gauge)
Low Oil Shutdown	y / n	Y
Hour Meter	y / n	Y
Starting System	type	Electric Key Start

### HYDRAULIC FEATURES

Pump / Head / Pistons	type	JW® Italian Triplex Plunger/Brass (Nickel Plated)/Ceramic
Motor Pump Coupling	type	Gearbox Drive
Pump Speed	rpm	1450
Unloader Valve	type	Independent
Safety Valve	y / n	Y
Orifice / Nozzle	size	055

### OTHER FEATURES

Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	Y (3 positions)
Frame Structure	type	Powder coated & galvanised modular skid with heavy gauge stainless steel cover
Onboard Accessory Storage	y / n	Y

### DIMENSIONS & WEIGHT

Approx Weight	kg	195 unit / 215 boxed
Unit Dimensions	mm	750(L) x 550(W) x 1300(H)
Boxed Dimensions	mm	850(L) x 600(W) x 1400(H)
Number per Pallet	type: pieces	Custom: 1

### WARRANTY(S)

Engine Warranty*	years	3
Pump Warranty*	years	3

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

V2.1 06/2021

\*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).